

Series: AXIAL-FAN Type A/AW

**FISCHBACH**

Luft- und Ventilatorentechnik GmbH

Type: **AW350/E15**

**ERP** KONFORM



**CE** -conform


**manufacturer:**  
Fischbach Luft- und Ventilatorentechnik GmbH  
Am Hellerberg 22-24  
D-57290 Neunkirchen  
phone: ++49(0)2735/777-0  
telefax: ++49(0)2735/770-625  
internet: www.fischbach-luft.de  
email: info@fischbach-luft.de

available: - only aggregate  
- with square wall frame, with grids  
- with round wall frame, with grids  
- with double-flansh pipe

### Technical Data

weight:	(kg)	14
material housing:		steel, galvanized
material impeller:		plastic
direction of rotation:		left
protection class:		IP 65
insulation class:		F
motor protection:		thermal contact

connection plan  
0.11-1 I.

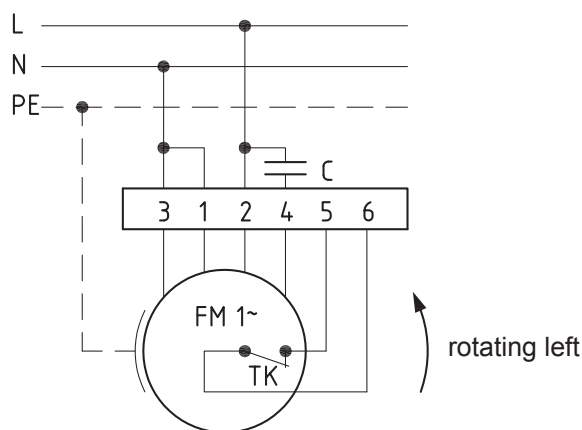

the silent one



Type: **AW350/E15**

Erp 2013\*\* x 2015 2018

**Performance data**


main voltage:	(V)	230 (1~)
frequency:	(Hz)	50
current max.:	(A)	1,3
power input max.:	(kW)	0,2
air flow volume max.:	(m³/h)	3464
statical pressure max.:	(Pa)	72
speed max.:	(rpm)	1380
supply air temperature:	(°C)	-25... +80
capacitor:	(µF)	6

\* aggregate/square-/round wall frame/double-flansh pipe

\*\* not suitable for distribution in EU countries, please choose an appropriate EC fan or contact our technical department

**ErP-Data:**

total efficiency fan ( $\eta_e$ ):	(%)	25,9
installation category:		A
efficiency category:		static
efficiency grade: N	(%)	36
target efficiency ( $\eta_{target}$ ):	(%)	25,1
speed controller		no
year of manufacturing		since 2015
manufacturer:	Fischbach Luft- und Ventilatorentechnik GmbH D-57290 Neunkirchen / HRB 5804 Siegen	
order no. *	18030221/18030421/18030321/18030521	
power input:	(kW)	0,19
air flow volume:	(m³/h)	2500
statical pressure:	(Pa)	71
speed:	(rpm)	1352
specific ratio:		1
disassembling/recycling/disposal:	see page decommission	
installation/operation/maintenance:	see operating and mounting instructions	
measurement for determination of efficiency without additional items		

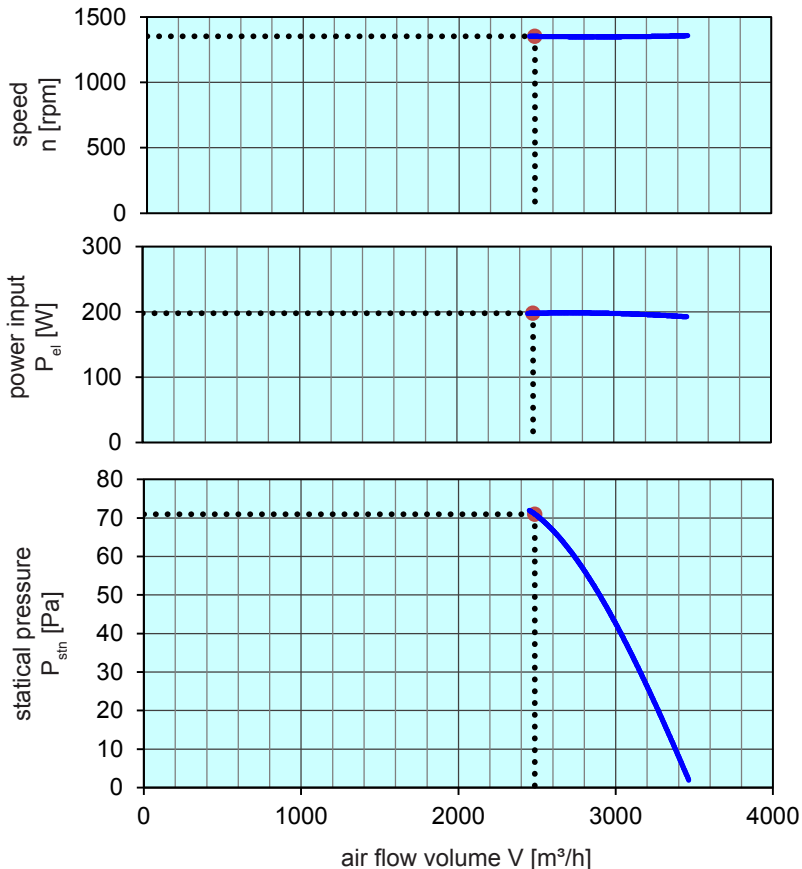

Speed controller / accessories / sound data, please see in the appropriate table

Technical documentation according to page: **General information**